



Floc-Tester Series

new



Your Key to Efficient Coagulation and Flocculation Testing


Precise flocculation testing is essential for cost efficient water and wastewater treatment.

OVERVIEW OF FUNCTIONS

The Lovibond® Floc-Tester provides reproducible laboratory simulations of real treatment conditions, enabling operators to define the right coagulant type and dosage before full-scale application. This ensures safe, economical and sustainable water treatment.



Floc-Tester ET840
Code 2419113

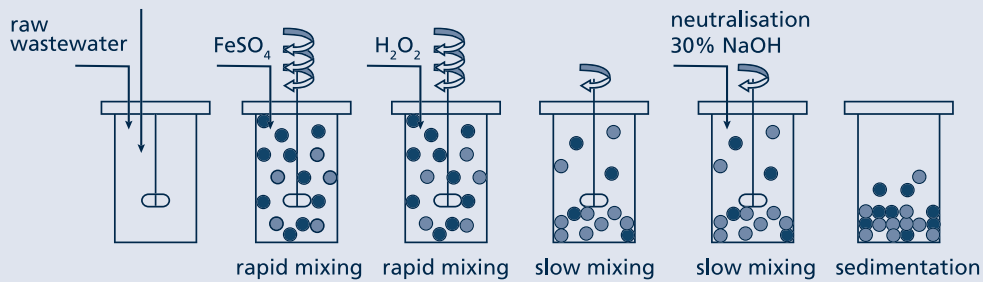

Two-step testing

Automatic change of stirring speed possible within a test

Stage 1: Coagulation – Rapid Mixing

Intense, short-term stirring ensures that the chemicals are distributed immediately and uniformly. Colloidally dissolved particles are destabilized (charge neutralization).


Very small primary flocs (microflocs) are formed.

Stage 2: Flocculation – Slow Mixing

The already destabilized particles gently collide.

They grow into visible, stable flocs.

Excessive mixing would break up the flocs, while insufficient mixing would prevent floc formation.

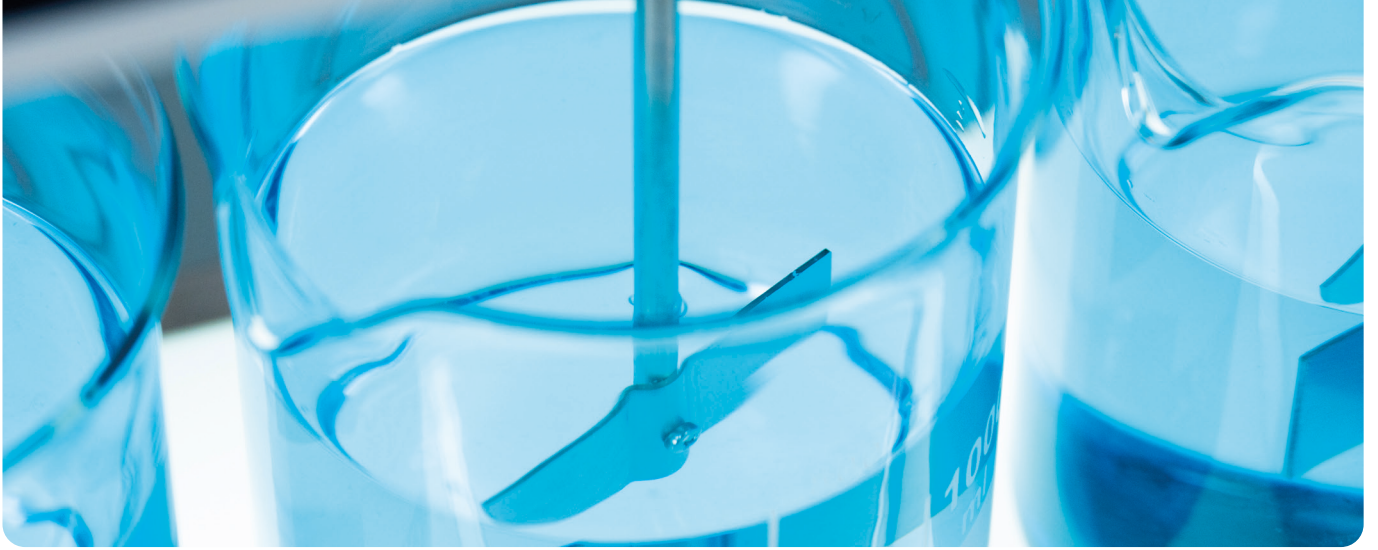

BENEFITS

Standards compliance

Allows to perform flocculation testing according to ASTM D2035-19

Versatile vessel compatibility

Suitable for beakers from 500 mL to 1500 mL (1500mL: ET830 complete, ET840 and ET850 on half of the stirring positions)

Two-step testing mode

Time-controlled or manual switching between two preset speeds for reproducible flocculation tests

Optimized visibility

Models ET840 & ET850 offer a flexible back- or base-lighting. The mobile Floc-Tester ET830 guarantees lighting from above

Built to last

Corrosion-resistant stainless-steel paddles

Good readability

Large, illuminated display

Simple & universal control

Intuitive, language-independent operating concept

Precision speed control

20 to 250 rpm digital adjustment

Smart timing options


1 to 240 minutes or permanent

Excellent mobility

Sturdy handles for transport, 12 V DC car adapter (ET830)

Flexible configurations

Four (ET830 & ET840) or six (ET850) stirring positions with adjustable paddle height

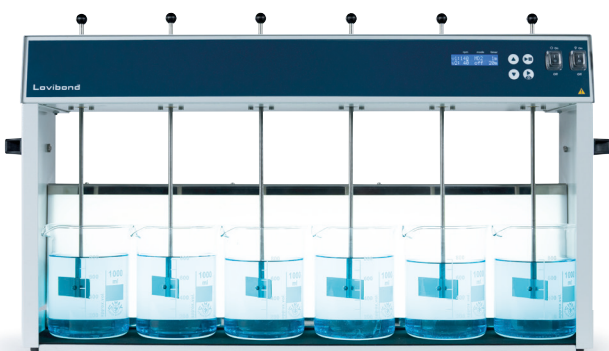

Floc-Tester ET850
Code 2419116



Floc-Tester ET830
Code 2419110



Typical Applications

Wastewater treatment

Simulate flocculation to improve sedimentation and sludge separation to reduce costs

Drinking water treatment

Determine the best coagulant and its dosage to achieve crystal-clear, safe water

Industrial process water

Optimize pretreatment of feeding-, cooling- and process-water for consistent quality

Research & education

Support in the development of new flocculants and laboratory experiments on coagulation and flocculation

ORDER INFORMATION

Part Number	Code
Floc-Tester ET830 portable with 4 stirring positions	2419110
Floc-Tester ET840 benchtop with 4 stirring positions, back/base illumination	2419113
Floc-Tester ET850 benchtop with 6 stirring positions, back/base illumination	2419116
Beaker glass, 1000 mL	419165
Beaker PP, 1000 mL	419166
Beaker glass, 1500 mL	419167
Transport bag for Floc-Tester ET830	419174



Optimized for mobile use:
Transport bag for Floc-Tester ET830



www.lovibond.com

Tintometer GmbH

Tel: +49 (0) 231/94510-0
sales@lovibond.com
Germany

Tintometer China

Tel: +86 10 85251111 ext. 330
Customer Care China: +86 021 69910081
Fax: +86 10 85251001
chinaoffice@tintometer.com
China

The Tintometer Limited

Tel: +44 1980 664800
support@lovibond.uk
UK

Tintometer South East Asia

Tel: +60 (0)3 3325 2285/6
lovibond.asia@tintometer.com
Malaysia

Tintometer Inc.

Tel: +1 941 756 6410
sales@lovibond.us
USA

Tintometer India Pvt. Ltd.

Tel: 1800 102 3891
indiaoffice@lovibond.in
India

Tintometer Spain

Tel: +34 661 606 770
sales@lovibond.com
Spain

Tintometer Brazil

Tel: +55 11 3230 6410
sales@lovibond.us
Brasil